



# DELTA SL

DELTA SL represents, within the loading movement, the most concrete answer to all requirements of power, ergonomics and safety.

DELTA SL is characterised by an innovative construction concept which has allowed the integration inside the machine body of an advanced battery charger.

## SPLIT CONTROL BOARD

Includes:  
- a classical push-button system on the steering ruddler.  
- a level system placed on the machine body which allows a speed modulation assuring an extremely soft and precise fork descent.

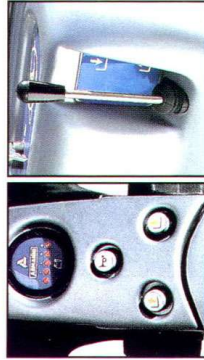

Battery charger controlled by a microprocessor which allows the battery recharging simply by connecting it directly to a 220V electric line.


## THERE IS A WIDE CHOICE OF OPTIONALS



The forks clearance can be adjusted laterally and horizontally.






The easiness of use and maintenance always distinguish the ARMANNI products, of which DELTA SL is the most modern and successful expression. The handy opening system of the bodywork, which allows to enter the machine body obstacle-free, makes the maintenance interventions easier.



The trucks are provided with a shock-absorber system so that the driving wheel adheres perfectly to the floor even in case of deep bumps.


Microprocessor controlled high-frequency "Mosfet" 24V electronics allows the trouble hunting through "Check-up led".

The computerised personalization of lift truck's performances can be carried out at the Armanni service centers.

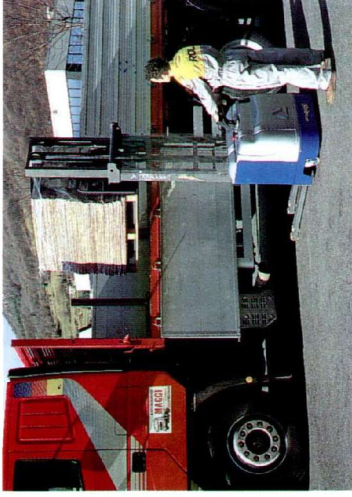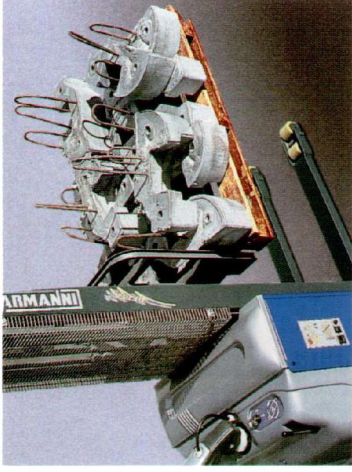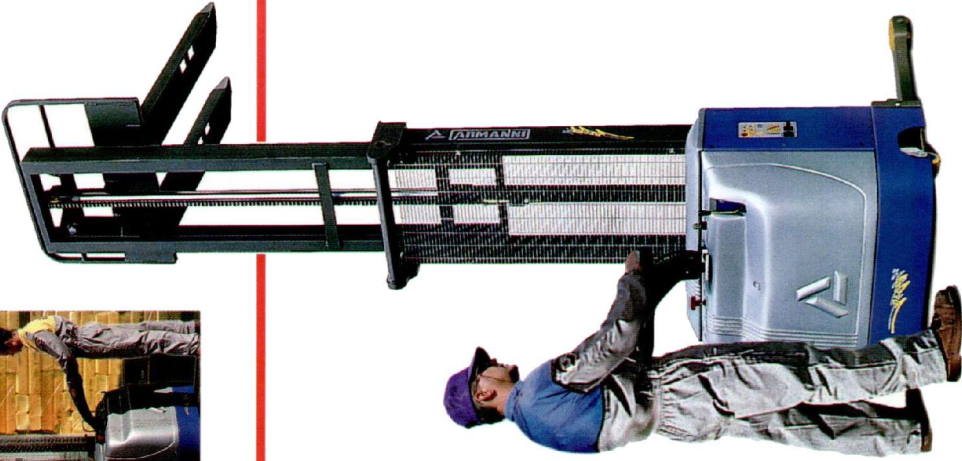


## DELTA SL/125 DELTA SL/155

Maximum load chart according to the maximum lift.



This chart shows the barycenter position change of the loads when they change.



### DELTA SL MODELS

	125/16	155/16	125/25	155/25	125/30	155/30	125/35	155/35
Q kg	1200	1500	1200	1500	1200	1500	1200	1500
C mm	600	1150	600	1150	600	1150	600	1150
L mm	1895	1915	1930	1950	1930	1950	1930	1950
X mm	375	175	410	175	410	175	410	175
X2 mm	175	1365	175	1365	175	1365	175	1365
Y mm	1345	745	1345	780	1345	780	1345	780
Z mm	745	530	780	530	780	530	780	530
M mm	530	160	530	160	530	160	530	160
N mm	1990	1740	1990	1740	1990	1740	1990	1740
h1 mm	1450	200	1450	200	1450	200	1450	200
h2 mm	1600	2500	1600	2500	1600	2500	1600	2500
h3 mm	2120	3020	2120	3020	2120	3020	2120	3020
h4 mm	840	840	840	840	840	840	840	840
B mm	1500	1520	1530	1550	1530	1550	1530	1550
WA mm	1500	1520	1530	1550	1530	1550	1530	1550

