

# MAX SL

MAX SL for extra heavy loads represents, within the loading movement, the most concrete answer to all requirements of power, ergonomics and safety.


MAX SL is characterised by an innovative construction concept which has allowed the integration inside the machine body of an advanced battery charger.

### SPLIT CONTROL BOARD

- a classical push-button system on the steering rudder.
- a level system placed on the machine body which allows a speed modulation assuring an extremely soft and precise fork descent.



Battery charger controlled by a microprocessor which allows the battery recharging simply by connecting it directly to a 220V electric line.




## THERE IS A WIDE CHOICE OF OPTIONALS



The easiness of use and maintenance always distinguish the ARMANNI products, of which MAX SL is the most modern and successful expression. The handy opening system of the bodywork, which allows to enter the machine body obstacle-free, makes the maintenance interventions easier.

Microprocessor controlled high-frequency "Mosfet" 24V electronics allows the trouble hunting through "Check-up led".

The computerised personalization of lift truck's performances can be carried out at the Armanni service centers.




The trucks are provided with a shock-absorber system so that the driving wheel adheres perfectly to the floor even in case of deep bumps.

The mast with special steel profiles assures excellent performances by using the truck for the usual and continuous movement of heavy loads, the double side pistons allow a perfect visibility on the forks to allow an easy hold of the pallet.




The forks clearance can be adjusted laterally.

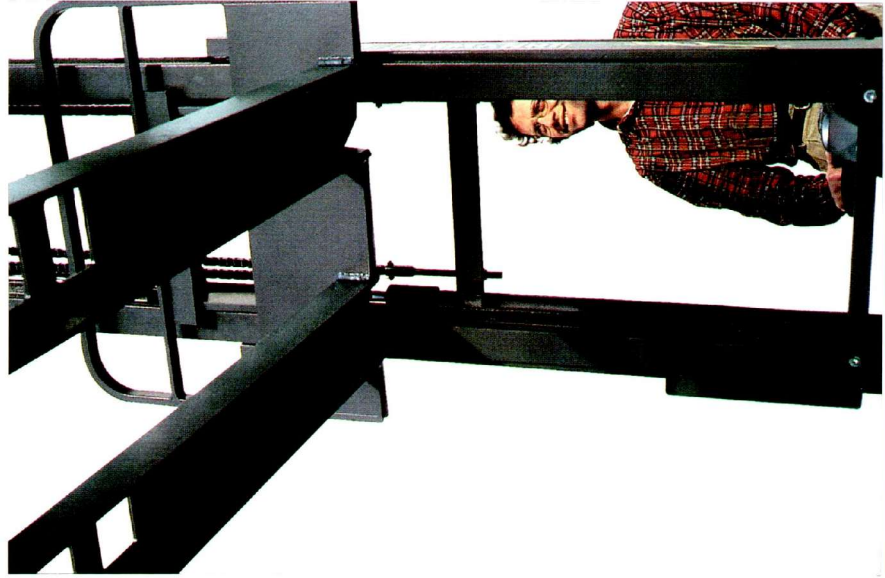


**MAX SL 130**  
**MAX SL 160**  
**MAX SL 200**

Maximum load chart according to the maximum lift



This chart shows the barycenter position change of the loads when they change.



MAX SL MODELS

	130/16	160/16	200/16	130/25	160/25	200/25	130/30	160/30	200/30	130/35	160/35	200/35
Q .kg	1300	1600	2000	1300	1600	2000	1300	1600	2000	1300	1600	2000
C .mm	600	600	600	600	600	600	600	600	600	600	600	600
I .mm	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150
L .mm	1970	1970	1930	1930	1930	1950	1930	1930	1950	1930	1930	1950
X .mm	350	350	370	370	370	370	370	370	370	370	370	370
X2 .mm	175	175	175	175	175	175	175	175	175	175	175	175
Y .mm	1365	1385	1385	1385	1405	1405	1385	1405	1405	1385	1405	1405
L2 .mm	760	780	780	780	800	800	780	800	800	780	800	800
M .mm	530	550	550	550	550	550	530	550	550	530	550	550
N .mm	160	180	180	160	180	180	160	180	180	160	180	180
h1 .mm	1990	1990	1740	1740	1740	1990	1990	1990	1990	1990	1990	2250
h2 .mm	1450	1450	200	200	200	200	200	200	200	200	200	200
h3 .mm	1600	1600	2500	2500	2500	3000	3000	3000	3000	3500	3500	3500
h4 .mm	2120	2120	3020	3020	3020	3520	3520	3520	3520	4020	4020	4020
B .mm	840	840	1000*	840	840	1000*	840	840	1000*	840	1000*	1000*
WA .mm	1550	1550	1570	1570	1570	1570	1570	1570	1570	1570	1570	1570

